



SEALON TECHNOLOGY LLC

Mechanical Seal Products





Welcome

Sealon Technology LLC specializes in the manufacturing and wholesale distribution of mechanical parts. What we do best is to provide high quality mechanical seals, components, and tungsten carbide products with most attractive prices. No matter whether you are looking for high quality parts to use in your own products or manufacturing, or planning to lower the cost of manufacturing your own tungsten carbide or mechanical seal products, we can be of great help.

For mechanical seals & components, we provide both contacting face and non-contacting face seals, and have expertise in welded metal bellows. Metal bellows can be of different material, and we mainly manufacture the ones with AM350, Hastelloy C-276, 17-4 PH and Inconel 718. The mechanical seal products we manufactured are widely distributed by our business partners in various industries.

Please also note that this catalog is by no means a comprehensive list of mechanical seals that we can supply, and you are highly recommended to contact us at info@sealontech.com in case of any question.

We look forward to hearing from you, and thank you for considering us for your business.



Working On Metal Bellows



Heating Treatment



Welding



Machine Shop





product samples

SEALON TECHNOLOGY



SLTD-A

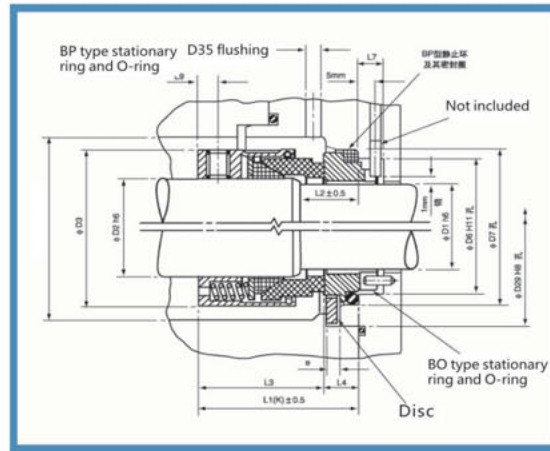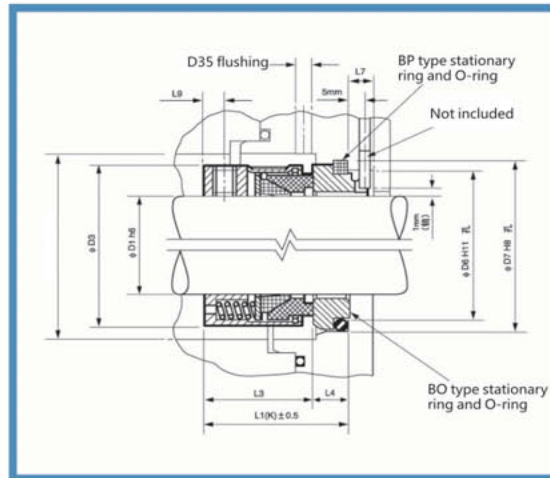

SLTD-B


SLTD-A sizes (mm)

D1	D3	D4	D6	D7	D8	D11	D12	D35	L1(K)	L3	L4	L5	L6	L7	L9
30	44	46	39	45	3	36.5	4.4	6.5	42.5	30.5	12.0	2.0	5	9.0	7.5
35	49	51	44	50	3	44.5	4.0	6.5	42.5	30.5	12.0	2.0	5	9.0	6.5
40	56	60	51	58	4	47.0	4.0	6.5	45.0	32.0	13.0	2.0	6	9.0	8.0
45	61	65	56	63	4	52.0	4.0	6.5	45.0	32.0	13.0	2.0	6	9.0	8.0
50	66	70	62	70	4	57.0	4.0	6.5	47.5	34.0	13.5	2.5	6	9.0	6.5
55	71	75	67	75	4	62.0	4.0	6.5	47.5	34.0	13.5	2.5	6	9.0	7.5
60	80	85	72	80	4	69.0	5.5	6.5	52.5	39.0	13.5	2.5	6	9.0	7.5
65	85	95	77	85	4	74.5	5.5	6.5	52.5	39.0	13.5	2.5	6	9.0	7.5
70	90	95	83	92	4	79.5	5.5	6.5	60.0	45.5	14.5	2.5	7	9.0	7.5
75	95	104	88	97	4	83.5	5.5	6.5	60.0	45.5	14.5	2.5	7	9.0	7.8
80	104	109	95	105	4	89.5	5.5	9.5	60.0	45.5	15.0	3.0	7	9.0	7.8
90	114	119	105	115	4	99.5	5.5	9.5	65.0	50.0	15.0	3.0	7	9.0	7.8
100	124	129	115	125	4	109.5	5.5	9.5	65.0	50.0	15.0	3.0	7	9.0	7.8

SLTD-B sizes (mm)

D1	D2	D3	D4	D6	D7	D8	D11	D12	D35	L1(K)	L3	L4	L5	L6	L7	L9
30	35	49	51	39	45	3	41.5	4.0	6.5	50.0	38.0	12.0	2.0	5	9.0	8.0
35	40	56	60	44	50	3	47.0	4.0	6.5	50.0	38.0	13.0	2.0	5	9.0	8.0
40	45	61	65	51	58	4	52.0	4.0	6.5	52.5	39.5	13.5	2.0	6	9.0	5.5
45	50	66	70	56	63	4	57.0	4.0	6.5	52.5	39.5	13.5	2.5	6	9.0	5.5
50	55	71	75	62	70	4	62.0	4.0	6.5	57.5	44.0	13.5	2.5	6	9.0	7.5
55	60	80	85	67	75	4	69.5	5.5	6.5	57.5	44.0	13.5	2.5	6	9.0	7.5
60	65	85	90	72	80	4	74.5	5.5	6.5	62.5	49.0	13.5	2.5	6	9.0	7.5
65	70	90	95	77	85	4	79.5	5.5	6.5	62.5	49.0	13.5	2.5	6	9.0	7.5
70	75	95	104	83	92	4	83.5	5.5	6.5	70.0	55.5	14.5	2.5	7	9.0	7.8
75	80	104	109	88	97	4	89.5	5.5	6.5	89.5	55.5	14.5	2.5	7	9.0	7.8
80	85	109	114	95	105	4	94.5	5.5	9.5	70.0	55.0	15.0	3.0	7	9.0	7.8
90	95	119	124	105	115	4	104.5	5.5	9.5	75.0	60.0	60.0	3.0	7	9.0	7.8
100	105	129	134	115	125	4	114.5	5.5	9.5	75.0	60.0	15.0	3.0	7	9.0	7.8

- Shaft seals for pumps, agitators, compressors with products similar to oil, water, organic solvents or corrosive solutions.
- SLTD-A is unbalanced.
- Temperature: -58°F ~480°F (-50°C ~ 250°C)
- Pressure: ≤ 1.7 MPa
- Speed: ≤ 4,000 r/min and 25 m/s
- Material: 304, 316, 316L, TA₂
- Seal face option: C-WC, C-SiC
- Complies with EN 12756 (formally DIN 24690), ISO 3069 and API 610.
- Replacement for seals similar to John Crane 59U with above working environment
- Shaft seals for pumps, agitators, compressors with products similar to oil, water, organic solvents or corrosive solutions.
- SLTD-B is balanced.
- Temperature: -58°F ~ 480°F (-50°C ~ 250°C)
- Pressure: ≤ 6.2MPa
- Speed: ≤ 4,000 r/min and 25 m/s
- Material: 304, 316, 316L, TA₂
- Seal face option: C-WC, C-SiC Complies with EN 12756 (formally DIN24690) ISO 3069 and API 610.
- Replacement for seals similar to John Crane 59B with above working environment

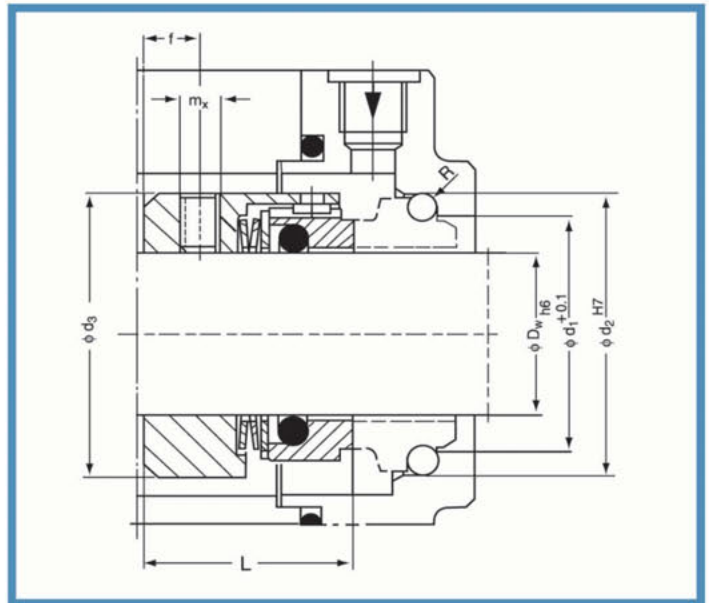


SLDM-A

- Shaft seals for pumps, agitators, compressors with products similar to oil, water, organic solvents or corrosive solutions.
- SLDM-A is unbalanced.
- Wave spring / super sinus spring, compact design.
- Temperature: 14°F ~ 428°F (-10°C ~ 220°C)
- Pressure: ≤ 2.0MPa
- Material: 304, 316, 316L, TA₂
- Seal face option: C-WC, C-SiC, C-Al₂O₃
- Complies with EN 12756 (formally DIN24690) and API 610.
- Replacement for Burgmann M7N with above working environment

SLDM-A sizes (mm)

D _w	d ₃	L _{±0.5}	l ₁	l ₂	l ₃	m ₁	m ₂	m ₃	f	mx	d ₁	d ₂	b	c	R	p	t _{0.1}	b
20	35	26	12.5	10.5	13.5	9.5	7.5	10.5	7	M5	29.5	35.0	6.5	1.5	1.5	7.0	1.1	5
25	40	28.5	12.5	10.0	13.5	9.5	7.5	10.5	8	M5	32.0	38.0	6.5	1.5	1.5	8.0	1.5	6
30	45	31.0	13.0	10.5	14.0	11.0	10.5	11.0	8	M6	39.2	45.0	6.5	1.5	1.5	8.0	1.5	6
35	50	31.0	14.5	13.5	14.0	11.5	11.0	11.5	8	M6	46.2	52.0	6.5	1.5	1.5	8.0	1.5	6
40	55	31.5	14.5	13.5	14.5	11.5	10.3	11.5	8	M6	49.2	55.0	6.5	1.5	1.5	8.0	1.5	6
45	62	31.5	17.0	14.5	17.0	14.3	11.6	14.3	8	M6	55.3	64.0	8.0	2.0	2.5	8.0	1.5	6
50	67	32.5	17.0	14.5	17.0	14.3	11.6	14.3	8	M6	60.8	69.3	8.0	2.0	2.5	8.0	1.5	6
55	72	32.5	18.0	16.0	18.0	15.3	13.3	15.3	8	M6	66.5	75.4	8.0	2.0	2.5	10.0	1.9	6
60	81	37.5	18.0	16.0	18.0	15.3	13.3	15.3	9	M8	71.5	80.4	8.0	2.0	2.5	10.0	1.9	8
65	86	37.5	16.0	16.0	18.0	15.3	13.0	15.3	9	M8	76.5	85.4	8.0	2.0	2.5	10.0	1.9	8
70	91	42.0	16.0	16.0	18.0	15.3	13.0	15.3	9	M8	83.0	92.0	8.0	2.0	2.5	10.0	1.9	8
75	99	42.0	18.0	17.0	19.0	15.3	14.0	16.3	10	M8	90.2	99.2	8.0	2.0	2.5	10.0	1.9	8
80	104	41.8	19.0	17.5	19.0	16.3	15.0	16.3	10	M8	95.2	104.0	8.0	2.0	2.5	10.0	1.9	8
85	109	41.8	19.0	17.5	19.0	16.3	14.8	17.3	10	M8	100.2	109.0	8.0	2.0	2.5	10.0	1.9	8
90	114	46.8	19.0	17.5	19.0	16.3	14.8	17.3	10	M8	105.5	114.0	8.0	2.0	2.5	12.5	2.3	10
95	119	47.8	20.0	18.5	20.0	17.3	15.8	18.3	10	M8	111.6	120.3	8.0	2.0	2.5	12.5	2.3	10
100	124	47.8	20.0	18.5	20.0	17.3	15.8	18.3	10	M8	114.5	123.3	8.0	2.0	2.5	12.5	2.3	10

SEALON TECHNOLOGY


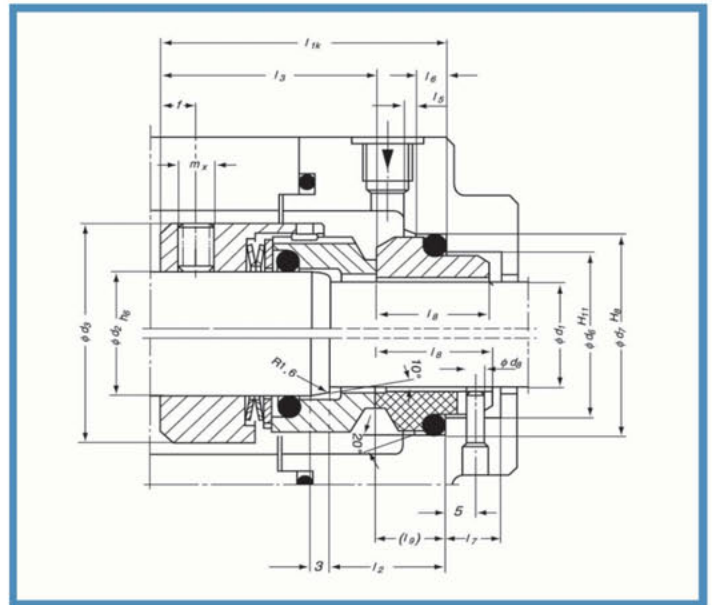


SLDM-B

- Shaft seals for pumps, agitators, compressors with products similar to oil, water, organic solvents or corrosive solutions.
- SLDM-B is balanced.
- Super-Sinus-spring used, compact design.
- Temperature: -148°F ~ 428°F (-100°C ~ 220°C)
- Pressure: ≤ 3.5MPa
- Material: 304, 316, 316L, TA₂
- Seal face option: C-WC, C-SiC, C-Al₂O₃
- Complies with EN 12756 (formally DIN24690) and API 610.
- Replacement for Burgmann H7N with above working environment

SLDM-B sizes (mm)

d ₁	d ₂	d ₃	d ₆	d ₇	d ₈	l ₅	l ₆	l _{1k±0.5}	l _{1N±4.0}	l ₂	l ₃	l ₇	l _{8/8'}	l ₉	f	t _{.01}	b
20	24	39	29	35	3	2.0	5	45.0	60	20	33.5	9	19.5	11.5	5.5	1.5	6
25	30	45	34	40	3	2.0	5	47.5	60	20	36.5	9	19.5	11.5	5.5	1.6	6
30	35	50	39	45	3	2.0	5	50.0	65	20	38.5	9	19.5	11.5	8.0	1.5	6
35	40	57	44	50	3	2.0	5	50.0	65	20	38.5	9	19.5	11.5	8.0	1.5	6
40	45	62	51	58	4	2.0	6	52.5	75	23	38.5	9	22.0	14.0	8.0	1.5	6
45	50	67	56	63	4	2.0	6	52.5	75	23	38.5	9	22.0	14.0	8.0	1.5	6
50	55	72	62	70	4	2.5	6	57.5	85	25	42.5	9	22.5	15.0	8.0	1.5	6
55	60	81	67	75	4	2.5	6	57.5	85	25	45.5	9	22.5	15.0	9.0	1.9	8
60	65	86	72	80	4	2.5	6	62.5	95	25	47.5	9	22.5	15.0	9.0	1.9	8
65	70	91	77	85	4	2.5	6	62.5	95	25	47.5	9	22.5	15.0	9.0	1.9	8
70	75	99	83	92	4	2.5	7	70.0	95	28	52.0	9	25.5	18.0	10.0	1.9	8
75	80	104	88	97	4	2.5	7	70.0	105	28	52.0	9	25.5	18.0	10.0	1.9	8
80	85	109	95	105	4	3.0	7	70.0	105	28	51.8	9	25.5	18.2	10.0	1.9	9
85	90	114	100	110	4	3.0	7	75.0	105	28	56.8	9	25.5	18.2	10.0	2.3	10
90	95	119	105	115	4	3.0	7	75.0	105	28	56.8	9	25.5	18.2	10.0	2.3	10
95	100	124	110	120	4	3.0	7	75.0	105	28	57.8	9	24.5	17.2	10.0	2.3	10
100	105	129	115	125	4	3.0	7	75.0	105	28	57.8	9	24.5	17.2	10.0	2.3	10

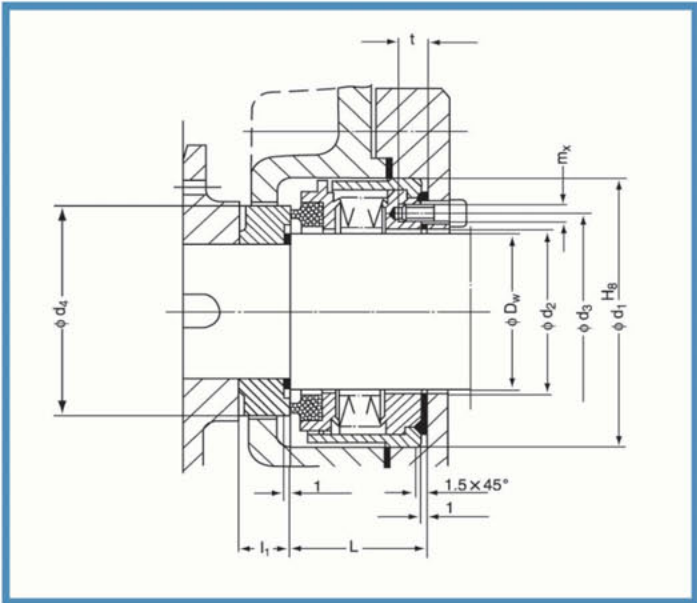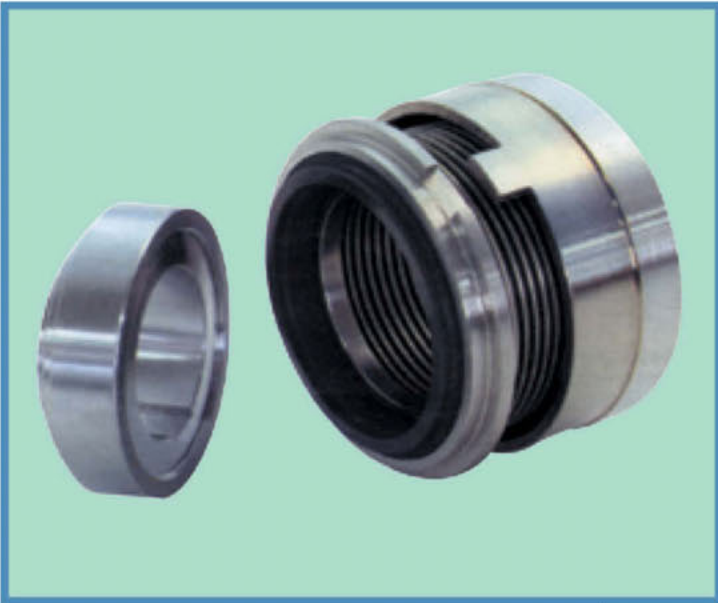



SLBM-A/B

- Shaft seals for pumps, agitators, compressors with high temperature products.
- Independent of direction of rotation.
- SLBM-A Temperature: -58°F ~ 480°F (-50°C ~ 250°C)
- SLBM-B Temperature: -58°F ~ 750°F (-50°C ~ 400°C)
- SLBM-A Pressure: ≤ 2.5 MPa
- SLBM-B Pressure: ≤ 6.5 MPa
- SLBM-A has single layer welded metal bellow.
- SLBM-B has double layer welded metal bellow.
- Rotating speed ≤ 5900 fpm (30 m/s)
- Depending on the working environment, One can choose single / double layer structure, and choose Hastelloy C-276, 17-4 PH or Inconel 718 as metal bellow material.
- Replacement for Burgmann MFL65 with above working environment

SLBM-A/B sizes (mm)

D _w	L	d ₁	d ₂	d ₃	n × m _x	t	l ₁	d _i
20-24	33.5	49.0	25.5	35	4 × M4	6	15	41.0
25-30	34.5	55.0	31.5	40	6 × M4	6	15	45.0
31-35	33.0	59.0	36.0	45	6 × M4	6	15	49.0
36-40	30.5	65.0	41.5	50	6 × M4	6	16	55.0
41-45	35.5	69.0	46.5	55	6 × M4	6	16	59.0
46-51	40.5	76.5	52.0	63	6 × M5	7	16	66.0
52-60	32.0	84.0	61.5	70	6 × M5	7	16	75.0
61-70	38.0	95.0	71.5	80	6 × M5	7	16	86.0
71-82	41.0	112.0	83.5	95	6 × M6	7	20	99.0
83-88	47.0	120.0	89.5	100	6 × M6	7	20	107.0
89-100	47.0	130.0	101.5	112	6 × M6	7	20	117.0

SEALON TECHNOLOGY

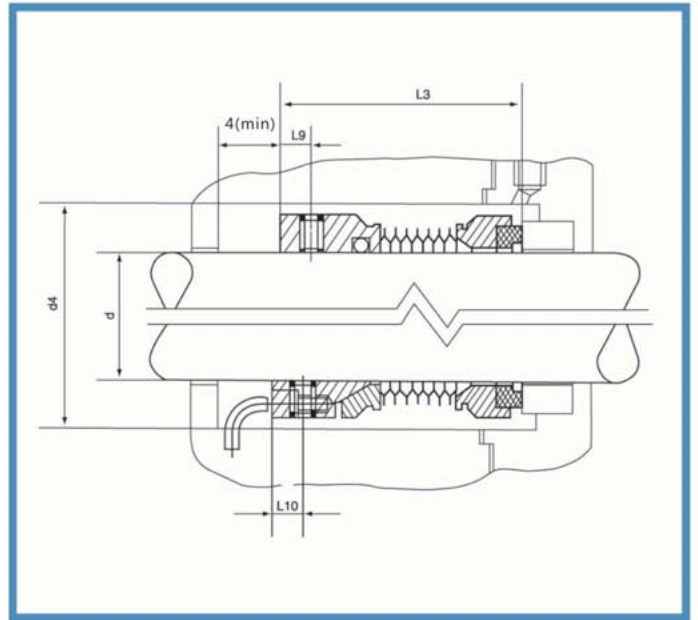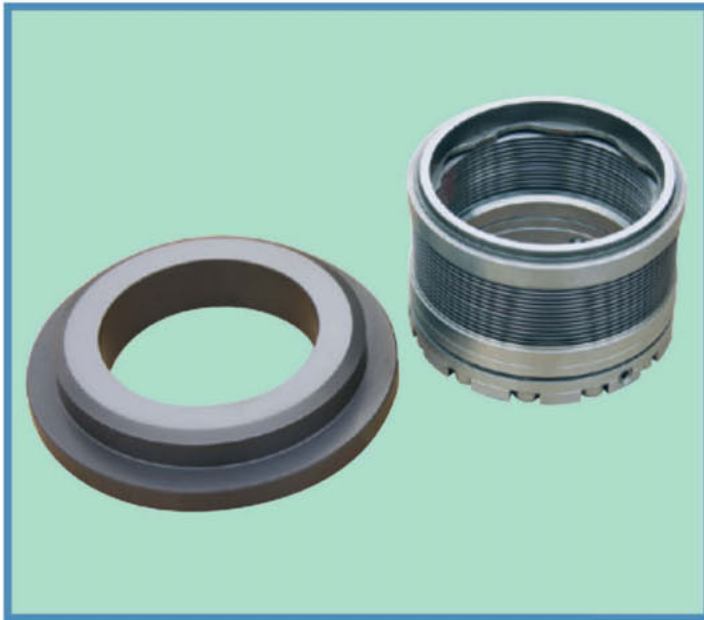

SLBM-C

- Shaft seals for pumps, agitators, centrifuge devices with relatively high pressure, cryogenics or high temperature.
- Metal bellow seal with shock absorption design.
- Temperature: -350°F ~750°F (-212°C ~ 400°C)(For high temperature, choose between metal wedge ring or graphite packing)
- Pressure: ≤ 2.5 MPa (Internal ≤ 1MPa)
- Suitable for products with relatively high viscosity.
- SLBM-C has single layer welded metal bellow.
- Rotating speed ≤ 4900 fpm (25 m/s)
- Depending on the working environment, One can choose Hastelloy C-276, 17-4 PH or Inconel 718 as metal bellow material.
- Replacement for seals similar to John Crane 15W, 15WO with above working environment


SLBM-C sizes (mm)

d>	d=	d ₄	L ₃	L10	L9
25	25	48	38.1	4.7	5
30	30	51	50.8	4.7	5
35	35	54	50.8	4.7	5
40	40	64	57.2	5.6	5
45	45	70	57.2	5.6	8
50	50	73	57.2	4.7	8
55	55	83	57.2	4.7	8
60	60	86	47.6	4.7	8
65	65	92	57.2	4.7	4.7
70	70	95	57.2	4.7	8
75	75	102	57.2	4.7	8
80	80	108	57.2	4.7	8
85	85	111	57.2	4.7	8
90	90	118	57.2	4.7	8
95	95	121	57.2	4.7	8
100	100	127	57.2	4.7	8

SEALON TECHNOLOGY



SLBM-D

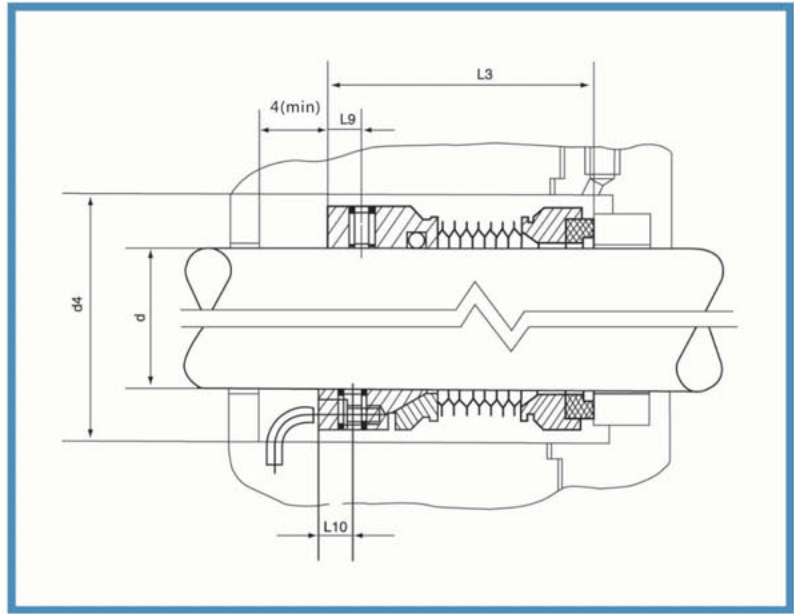


- Shaft seals for pumps, agitators, centrifugedevices with relatively high pressure, cryogenics or high temperature.
- Shorter axis design compared with SLBM-C
- Metal bellow seal with shock absorption design.
- Temperature: -350°F ~750°F (-212°C ~ 400°C)(For high temperature, choose between metal wedge ring or graphite packing)
- Pressure: ≤ 2.5 MPa (Internal ≤ 1 MPa)
- Suitable for products with relatively high viscosity.
- SLBM-D has single layer welded metal bellow.
- Rotating speed ≤ 4900 fpm (25 m/s)
- Depending on the working environment, One can choose Hastelloy C-276, 17-4 PH or Inconel 718 as metal bellow material.
- Replacement for seals similar to John Crane 15WT, 15WTO with above working environment


SLBM-D sizes (mm)

d>	d=	d ₄	L ₃	L10	L9
25	25	40	33.4	3	4.75
30	30	47	34.9	3	5
35	35	51	38.1	3	5
40	40	59	38.1	3.3	5
45	45	66	41.3	3.3	5
50	50	73	44.5	4	6
55	55	76	44.5	4	6
60	60	79	44.5	4	6
65	65	86	46	4	6
70	70	89	46	4	6
75	75	95	46	4	6
80	80	102	47.5	4	6
90	90	113	47.5	4	6
95	95	115	47.5	4	6
100	100	121	47.5	4	6

SEALON TECHNOLOGY

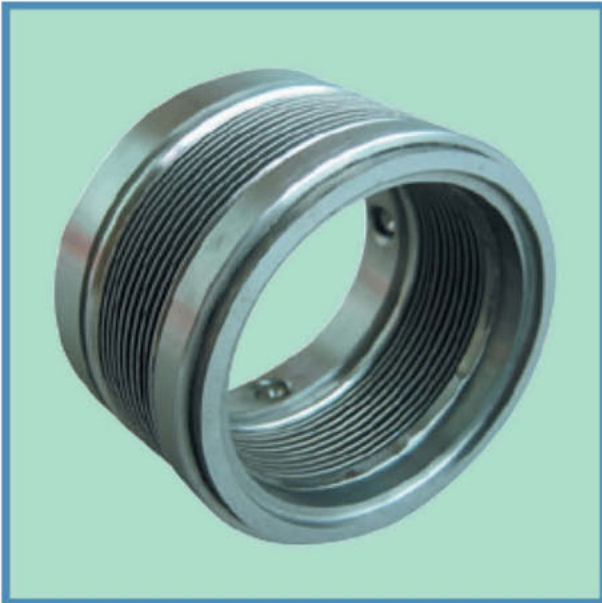

SLBM-E

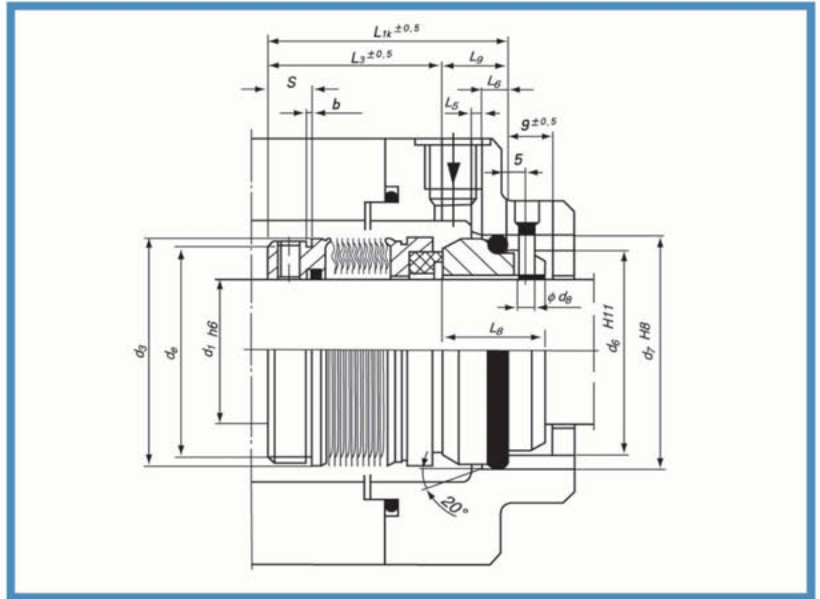


- Shaft seals for pumps, agitators, centrifuge devices with relatively high pressure and a relatively wide temperature range.
- SLBM-E has single layer welded metal bellow.
- Temperature: -40°F ~428°F (-40°C ~ 220°C)
- Pressure: ≤ 2.5 MPa
- Suitable for products with relatively high viscosity.
- Rotating speed ≤ 3900 fpm (20 m/s)
- Depending on the working environment, One can choose Hastelloy C-276, 17-4 PH or Inconel 718 as metal bellow material.
- Complies with EN 12756 (formally DIN24690).
- Replacement for seals similar to BurgmannMFL85N with above working environment

SLBM-E sizes (mm)

d ₁	d ₃	d ₆	d ₇	d ₈	d _e	d _s	l _{1k}	l ₃	l ₅	l ₆	l ₈	l ₉	l ₁₈	l ₁₉	b	s
20	33.5	29	35	3	29.5	41	37.5	30.5	2.0	5	14.0	7.0	15.0	7.0	1.6	10.0
25	39.6	34	40	3	35.5	48	40.0	28.5	2.0	5	19.5	11.5	15.0	7.0	1.6	8.5
30	45.0	39	45	3	40.5	53	42.5	31.0	2.0	5	19.5	11.5	15.0	7.0	1.6	8.5
35	49.2	44	50	3	45.5	58	42.5	31.0	2.0	5	19.5	11.5	15.0	7.0	1.6	9.5
40	55.5	51	58	4	50.0	64	55.0	31.0	2.0	6	22.0	14.0	16.0	8.0	1.6	9.2
45	58.7	56	63	4	55.0	69	45.0	31.0	2.0	6	22.0	14.0	16.0	8.0	1.6	9.5
50	65.0	62	70	4	60.5	74	47.5	32.5	2.5	6	23.0	15.0	17.0	9.5	1.6	10.5
55	70.0	67	75	4	65.5	80	47.5	32.5	2.5	6	23.0	15.0	17.0	9.5	1.6	10.0
60	74.6	72	80	4	69.5	85	52.5	37.5	2.5	6	23.0	15.0	18.0	10.5	3.0	14.0
65	84.1	77	85	4	78.0	95	52.5	37.5	2.5	6	23.0	15.0	18.0	10.5	3.0	14.0
70	87.3	83	92	4	81.0	96	60.0	42.0	2.5	7	26.0	18.0	19.0	11.5	3.0	17.0
75	95.0	88	97	4	87.0	104	60.0	42.0	2.5	7	26.0	18.0	19.0	11.5	3.0	16.0
80	98.4	95	105	4	91.0	109	60.0	41.8	3.0	7	26.2	18.2	19.0	11.5	3.0	16.0
85	104.7	100	110	4	96.0	114	60.0	41.8	3.0	7	26.2	18.2	19.0	11.5	3.0	16.0
90	111.0	105	115	4	103.0	119	65.0	46.8	3.0	7	26.2	18.2	20.5	13.0	3.0	21.0
95	111.4	110	120	4	106.0	124	65.0	47.8	3.0	7	25.2	17.2	20.5	13.0	3.0	21.0
100	117.4	115	125	4	111.0	129	65.0	47.8	3.0	7	25.2	17.2	20.5	13.0	3.0	20.0



SLBM-F

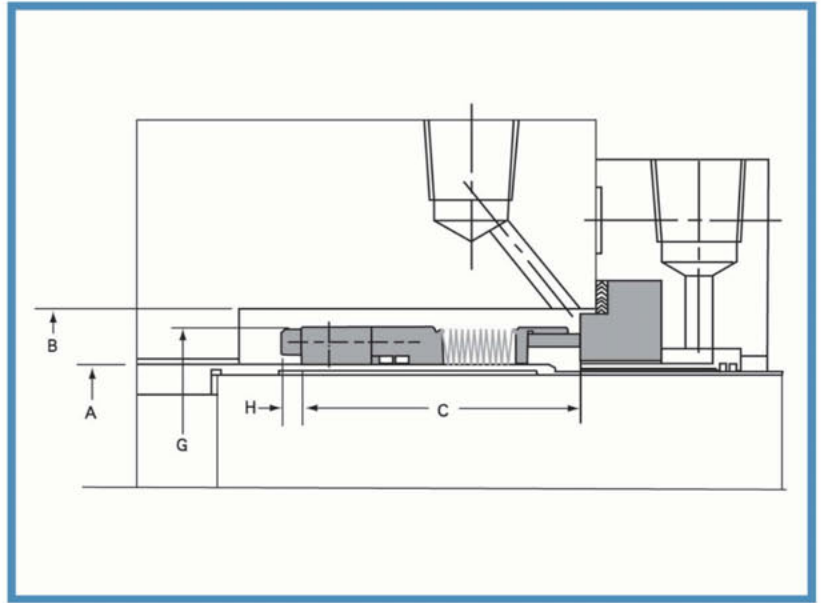

- Shaft seals for pumps, agitators, centrifuge devices with relatively high pressure and high temperature.
- Welded metal bellow seal with graphite packing
- Temperature: $-58^{\circ}\text{F} \sim 750^{\circ}\text{F}$ ($-50^{\circ}\text{C} \sim 400^{\circ}\text{C}$)
- Pressure: $\leq 7.5 \text{ MPa}$
- SLBM-F has double layer welded metal bellow.
- Rotating speed $\leq 4900 \text{ fpm}$ (25 m/s)
- Depending on the working environment, One can choose Hastelloy C-276, 17-4 PH or Inconel 718 as metal bellow material.
- Replacement for seals similar to John Crane 715 with above working environment

SLBM-F sizes (mm)

A	G	B	C
25.40	38.9	41.3	44.5
28.58	42.1	44.5	44.5
31.75	45.2	47.6	44.5
34.93	49.2	50.8	44.5
38.10	54.0	57.2	50.8
41.28	57.2	60.3	50.8
44.45	60.3	63.5	50.8
47.63	63.5	66.7	50.8
50.80	66.7	69.9	50.8
53.98	69.9	73.0	50.8
57.15	73.0	76.2	50.8
60.33	76.2	79.4	50.8
63.50	79.4	82.6	50.8
66.68	82.6	85.7	50.8
69.85	92.1	95.3	57.15
73.03	95.3	98.4	57.15
76.20	98.4	101.6	57.15
79.38	101.6	104.8	57.15
82.55	104.8	108.0	57.15
85.73	110.3	114.3	57.15
88.90	113.5	117.5	57.15
92.08	116.7	120.7	57.15
95.25	119.8	123.8	57.15
98.43	123.0	127.0	60.325
101.60	126.2	130.2	60.325

SEALON TECHNOLOGY


Mechanical Seals for PTA Devices



Metal bellow seal for steam tube rotary dryer



Metal bellow seal (TA₂) for centrifuge device.

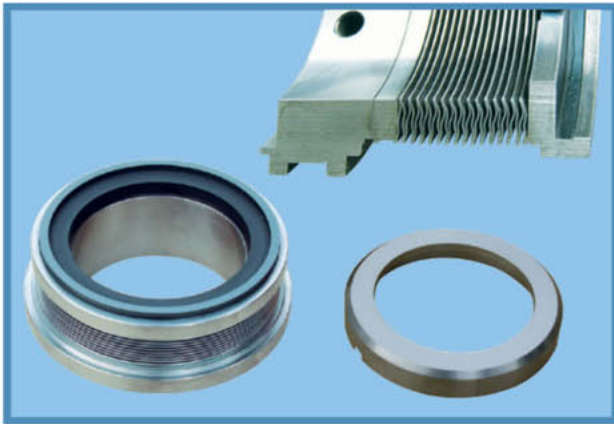


Metal bellow seal (TA₂) for pumps for acetic acid



Replacement for seals similar to John Crane SB2 dual cartridge seal for acetic acid pump. Material: AISI 310 + TA₂ + SiC – M106K.

Shaft size 90mm

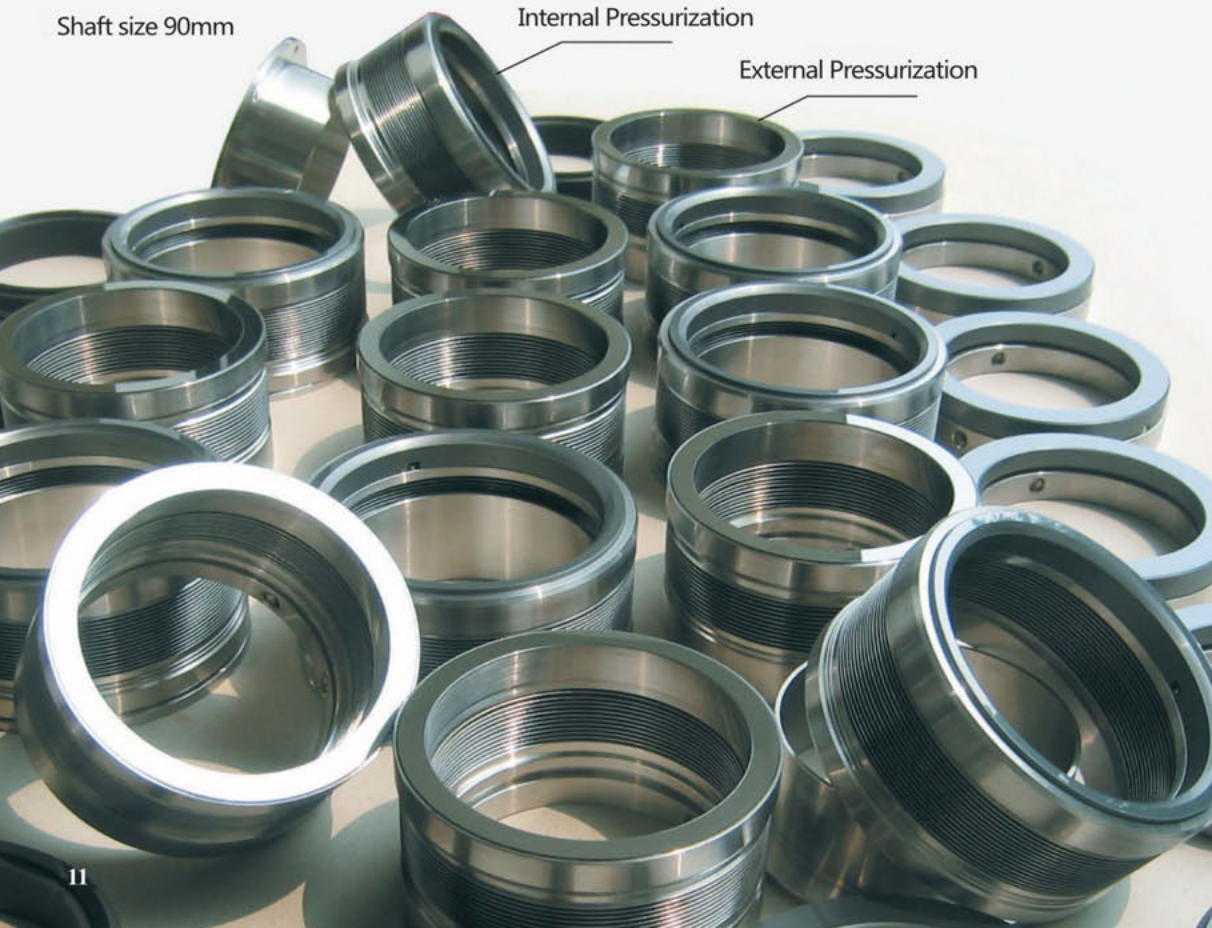


Sample welded metal bellow seals we provided to some clients

SEALON TECHNOLOGY




- Mechanical seals for various high speed Sundyne pumps
- Can be used for
 - LMV/BMP-313/333
 - LMV/BMP-311/331
 - LMV/BMP-338
 - LMC/BMC-311F
 - LMC/BMC-311P/331F/331P
 - LMC/BMC-317/337/313/333

Metal bellow seals that can replace 60A, 60B, 60C, 12A, 16A, 18A. They have been used with environment below: temperature 300 C, pressure about 3.5MPa, 12500 r/min, liquid media.

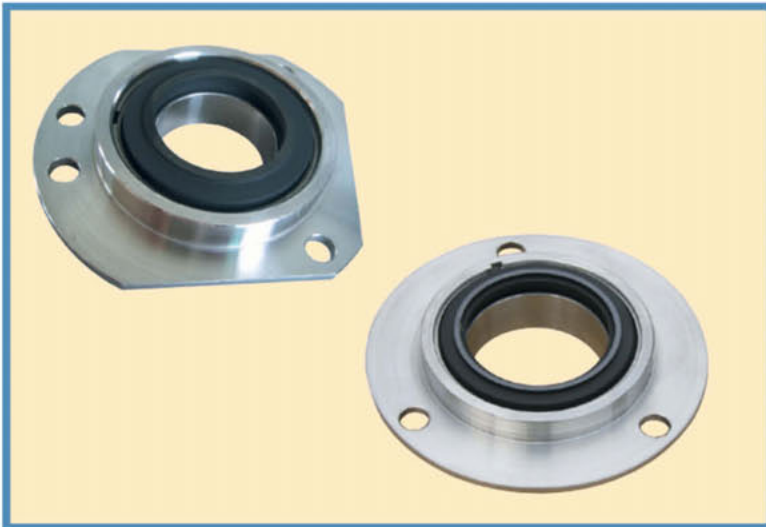

Bushing for high speed pumps.

Spring based mechanical seals that can replace 60A, 60B, 60C, 12A, 16A, 18A.

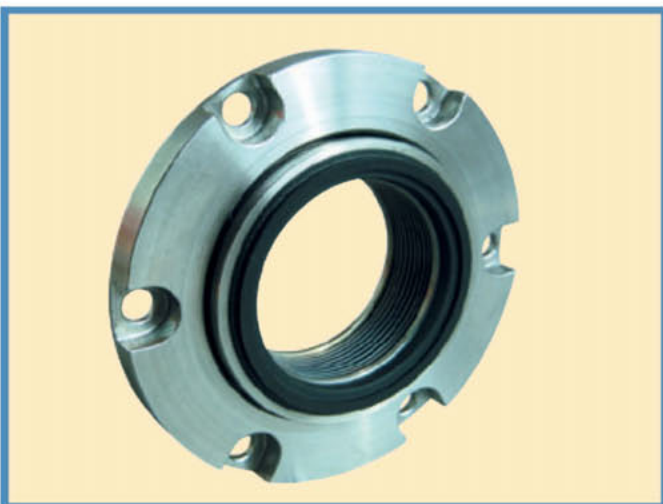


Metal bellow seal for hydrocarbon material.




High speed pump bearing / journal with Indium coating

SEALON TECHNOLOGY

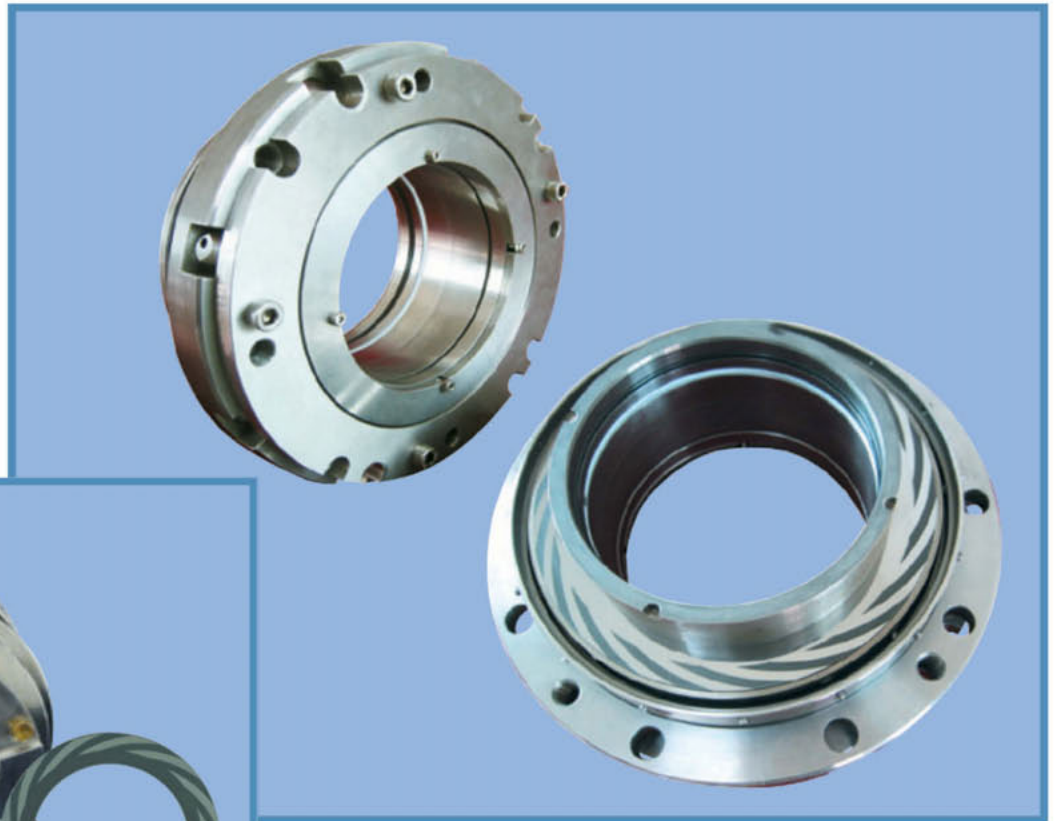

Non-contacting face mechanical seal

Non-contacting face seal that replaced John Crane type 28 seal in a pump for toxic material

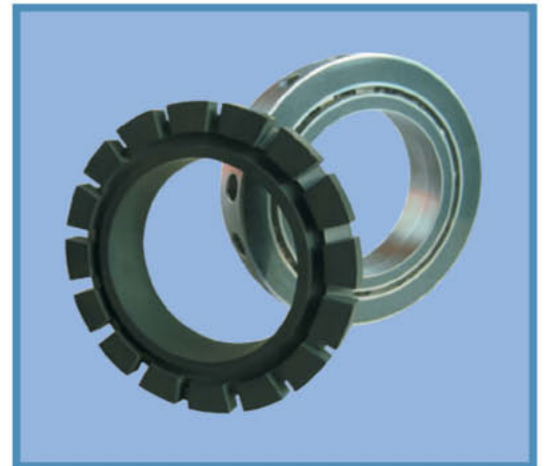

Groove design to effectively utilize fluid-dynamic force



Request For Quote

The product list in this catalog is not a comprehensive list of what we can manufacture and supply. If you are interested in mechanical seal products, we highly recommend you to send a request for quote to us.

Please fill the form below with as much information as you can, and either send an e-copy to sales@sealontech.com, or fax to +1 866-576-1858, and we will get in touch with you soon after that.

If you have mechanical drawing of the product, please send it along with the filled form below.

Client Contact Information			
Company Name		Contact	
Address		Telephone	
Email		Zip Code	
Mechanical Seal Product			
product No. (If known)			
Seal Type	1. Spring based. 2. Welded metal bellows. 3. Others		
Seal Face Options	Rotating Ring:	Stationary Ring:	
Working Environment:			
SealedProduct _____	Temperature Range _____	Viscosity _____	
Chamber Pressure _____	Inlet Pressure _____	Outlet Pressure _____	
Rotating Speed: _____ (fpm or m/s)			
More on the product sealed	1. Clean; 2. Slurry; 3. Strong corrosive ; 4. Weak corrosive; 5. Hazard or toxic; 6. Volatile; 7. Other Property:		
Seal Category	1. Cartridge; 2. Inbound; 3. Outbound		
Shaft Size			
Other Information			

What do we offer:

- Cost Effective Manufacturing Solution
- Client Customized Solution
- Competitive and Reliable Solution

Telephone: +1 630-229-8660

Fax: +1 866-576-1858

Website: <http://www.sealontech.com>

Email: info@sealontech.com



**SEALON
TECHNOLOGY**

We have worked with our clients to provide high quality, cost effective mechanical seal solution for various pumps, mixers, agitators and centrifuge devices.

If you have interest in these products, please contact us for our product trial offering.

